

# MS901

## Backhoe Industrial Service

The aggressive, self-cleaning, flat tread provides high traction, excellent stability and durability in tough & demanding applications.


- ##Excellent grip
- ##Wear & cut resistant tread compound
- ##Specially designed domed mud breakers for optimum self-cleaning
- ##Reduced vibration & increased stability
- ##Deep under tread for improved puncture resistance
- ##Protected sidewall for increased cut resistance



### Applications



### Footprint

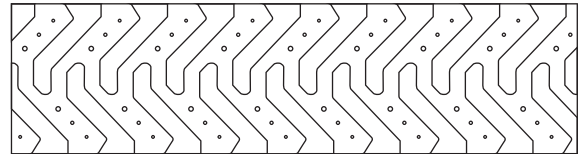

Size	PR	Type	Rim	LI / SR	Unit	Tire Dimensions		
						Tread Depth	Section Width	Overall Diameter
12.5/80-18 (340/80-18)	12	TL	11.00	143A8	in.	33/32	12.2	38.7
					mm	26	310	985
12.5/80-18 (340/80-18)	16	TL	11.00	148A8	in.	33/32	12.2	38.7
					mm	26	310	985