

# MS905

## Grader

The aggressive, self-cleaning, flat tread provides high traction, excellent stability and durability in tough & demanding applications.


- Wear & cut resistant tread compound
- Specially designed domed mud breakers for optimum self-cleaning
- Reduced vibration & increased stability
- Deep under tread for improved puncture resistance
- Protected sidewall for increased cut resistance



### Applications



### Footprint

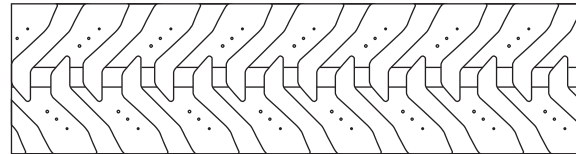

Size	PR	Type	Rim	LI / SR	Unit	Tire Dimensions		
						Tread Depth	Section Width	Overall Diameter
13.00-24	12	TL	8.00TG	143A8	in.	32/32	13.7	50.2
					mm	25	349	1276
13.00-24	14	TL	8.00TG	146A8	in.	32/32	13.7	50.2
					mm	25	349	1276
13.00-24	16	TL	8.00TG	149A8	in.	32/32	13.7	50.2
					mm	25	349	1276
14.00-24	12	TL	8.00TG	147A8	in.	32/32	14.5	53.0
					mm	25	368	1346
14.00-24	16	TL	8.00TG	153A8	in.	32/32	14.5	53.0
					mm	25	368	1346