

MSV01

Highway Service

The aggressive, self-cleaning tread design provides excellent traction in tough, demanding applications.


- Reduced wheel spin & improved traction
- Excellent resistance to cuts and damage
- Suitable for On & Off Road use
- Improved operator comfort
- Self-cleaning tread
- Low road noise and reduced vibration



Applications



Footprint

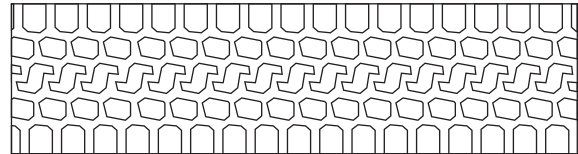

Size	Load Index & Speed Symbol	Star Rating	Type	Rim	Unit	Tire Dimensions		
						Tread Depth	Section Width	Overall Diameter
14.00R24 (385/95R24)	170F	/	TT	10.00 W	in.	29/32	15.7	54.2
					mm	23	399	1376
14.00R25 (385/95R25)	170F	/	TL	9.50/1.7 CR 10.00/1.5	in.	29/32	15.7	54.2
					mm	23	399	1376
16.00R25 (445/95R25)	174F	/	TL	11.00/1.7 CR 11.25/2.0	in.	34/32	18.3	59.1
					mm	27	465	1500
20.5R25 (525/80R25)	177F	/	TL	17.00/1.7 CR 17.00/2.0	in.	37/32	20.3	59.2
					mm	30	516	1504